
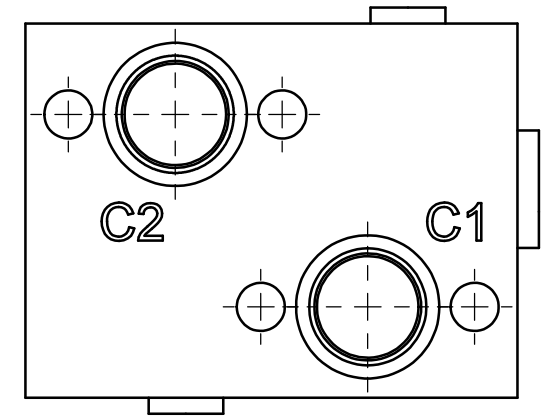
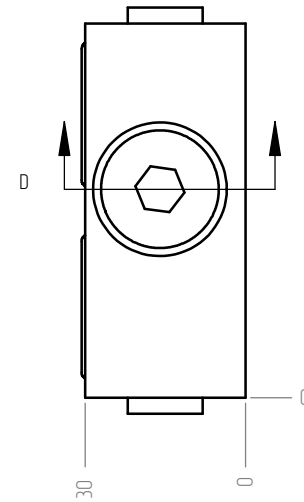


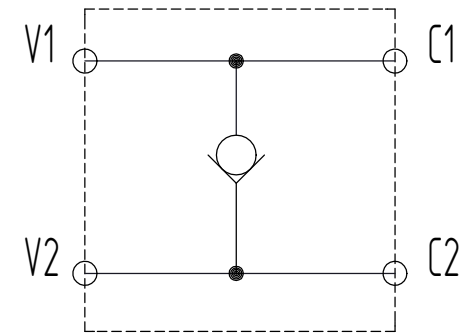

- 1.Maximum working pressure: 250 bar;
- 2.Maximum working flow rate: 50 L/min;
- 3.Check valve opening pressure: 0.34 bar;
- 4.Check valve internal leakage: 5 drops/min at 240 bar;
- 5.Ports V1/V2: G 1/2;
- 6.Laser marking for V1 and V2; no marking for C1 and C2.
- 7.Working Temperature: -20 ~ +90°C
- 8.Manifold Material: 6061-T6, Surface Anodizing Treatment

[illegible]